


CPF Fully Threaded Universal Woodscrew Range

Manufactured exclusively for Rapiertstar by ISO 9001:2008 company

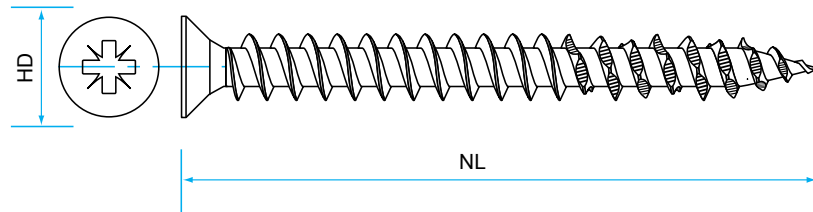

Designed for:	All timber applications			
Head Style:	Double Countersunk			
Recess:	Extra Deep Pozi			
Thread Form:	Single Thread			
Point:	Fast starting. Pentagonal StarForm cutting thread portion with debris clearance grooves			
Coating:	Electroplated Zinc or Yellow plus Lubricant.			
Durability:	Service Class 1 acc. to EN 1995-1-1 (EN 1670: Grade 3)			
Shank Material:	Carbon Steel			
Material Grade:	AISI C1018/C1022			
Effective Length:	Fully Threaded			
Product Code	Size – Shank x NL	Bit Size	HD	Box Quantity
CPF 3.0 x 12 Y or Z	3.0mm x 12.0mm	PZ1	5.8mm ± 0.20mm	200
CPF 3.0 x 16 Y or Z	3.0mm x 16.0mm	PZ1	5.8mm ± 0.20mm	200
CPF 3.0 x 20 Y or Z	3.0mm x 20.0mm	PZ1	5.8mm ± 0.20mm	200
CPF 3.0 x 25 Y or Z	3.0mm x 25.0mm	PZ1	5.8mm ± 0.20mm	200
CPF 3.0 x 30 Y	3.0mm x 30.0mm	PZ1	5.8mm ± 0.20mm	200
CPF 3.5 x 12 Y or Z	3.5mm x 12.0mm	PZ2	6.8mm ± 0.20mm	200
CPF 3.5 x 16 Y or Z	3.5mm x 16.0mm	PZ2	6.8mm ± 0.20mm	200
CPF 3.5 x 20 Y or Z	3.5mm x 20.0mm	PZ2	6.8mm ± 0.20mm	200
CPF 3.5 x 25 Y or Z	3.5mm x 25.0mm	PZ2	6.8mm ± 0.20mm	200
CPF 3.5 x 30 Y or Z	3.5mm x 30.0mm	PZ2	6.8mm ± 0.20mm	200
CPF 3.5 x 35 Y or Z	3.5mm x 35.0mm	PZ2	6.8mm ± 0.20mm	200
CPF 3.5 x 40 Y or Z	3.5mm x 40.0mm	PZ2	6.8mm ± 0.20mm	200
CPF 3.5 x 50 Y or Z	3.5mm x 50.0mm	PZ2	6.8mm ± 0.20mm	200
CPF 4.0 x 16 Y or Z	4.0mm x 16.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 20 Y or Z	4.0mm x 20.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 25 Y or Z	4.0mm x 25.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 30 Y or Z	4.0mm x 30.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 35 Y or Z	4.0mm x 30.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 40 Y or Z	4.0mm x 40.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 45 Y or Z	4.0mm x 45.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 50 Y or Z	4.0mm x 50.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 60 Y or Z	4.0mm x 60.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 70 Y or Z	4.0mm x 70.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.0 x 80 Y or Z	4.0mm x 80.0mm	PZ2	7.75mm ± 0.25mm	200
CPF 4.5 x 25 Y or Z	4.5mm x 25.0mm	PZ2	8.75mm ± 0.25mm	200
CPF 4.5 x 30 Y or Z	4.5mm x 30.0mm	PZ2	8.75mm ± 0.25mm	200


CPF Fully Threaded Universal Woodscrew Range - continued.

Manufactured exclusively for Rapiertar by ISO 9001:2008 company

Product Code	Size – Shank x NL	Bit Size	HD	Box Quantity
CPF 4.5 x 35 Y or Z	4.5mm x 35.0mm	PZ2	8.75mm ± 0.25mm	200
CPF 4.5 x 40 Y or Z	4.5mm x 40.0mm	PZ2	8.75mm ± 0.25mm	200
CPF 4.5 x 50 Y or Z	4.5mm x 50.0mm	PZ2	8.75mm ± 0.25mm	200
CPF 4.5 x 60 Y or Z	4.5mm x 60.0mm	PZ2	8.75mm ± 0.25mm	200
CPF 4.5 x 70 Y or Z	4.5mm x 70.0mm	PZ2	8.75mm ± 0.25mm	200
CPF 4.5 x 80 Y	4.5mm x 25.0mm	PZ2	8.75mm ± 0.25mm	200
CPF 5.0 x 25 Y or Z	5.0mm x 25.0mm	PZ2	9.75mm ± 0.25mm	200
CPF 5.0 x 30 Y or Z	5.0mm x 30.0mm	PZ2	9.75mm ± 0.25mm	200
CPF 5.0 x 35 Y or Z	5.0mm x 35.0mm	PZ2	9.75mm ± 0.25mm	200
CPF 5.0 x 40 Y or Z	5.0mm x 40.0mm	PZ2	9.75mm ± 0.25mm	200
CPF 5.0 x 45 Y or Z	5.0mm x 45.0mm	PZ2	9.75mm ± 0.25mm	200
CPF 5.0 x 50 Y or Z	5.0mm x 50.0mm	PZ2	9.75mm ± 0.25mm	200
CPF 5.0 x 60 Y or Z	5.0mm x 60.0mm	PZ2	9.75mm ± 0.25mm	200
CPF 5.0 x 70 Y or Z	5.0mm x 70.0mm	PZ2	9.75mm ± 0.25mm	200
CPF 5.0 x 80 Y or Z	5.0mm x 80.0mm	PZ2	9.75mm ± 0.25mm	200
CPF 6.0 x 40 Y or Z	6.0mm x 40.0mm	PZ3	11.75mm ± 0.25mm	200
CPF 6.0 x 50 Y or Z	6.0mm x 50.0mm	PZ3	11.75mm ± 0.25mm	200
CPF 6.0 x 60 Y or Z	6.0mm x 60.0mm	PZ3	11.75mm ± 0.25mm	200
CPF 6.0 x 70 Y or Z	6.0mm x 70.0mm	PZ3	11.75mm ± 0.25mm	200
CPF 6.0 x 80 Y or Z	6.0mm x 80.0mm	PZ3	11.75mm ± 0.25mm	100

CPP PartiallyThreaded Universal Woodscrew Range

Manufactured exclusively for Rapiertstar by ISO 9001:2008 company

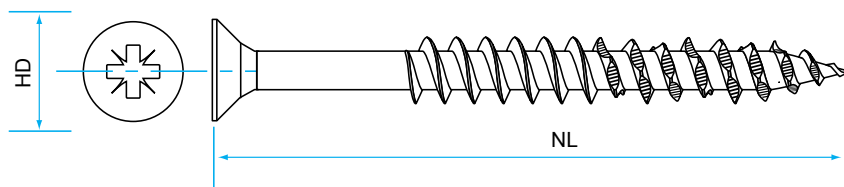

Designed for:	All timber applications			
Head Style:	Double Countersunk			
Recess:	Extra Deep Pozi			
Thread Form:	Single Thread			
Point:	Fast starting. Pentagonal StarForm cutting thread portion with debris clearance grooves			
Coating:	Electroplated Zinc or Yellow plus Lubricant.			
Durability:	Service Class 1 acc. to EN 1995-1-1 (EN 1670: Grade 3)			
Shank Material:	Carbon Steel			
Material Grade:	AISI C1018/C1022			
Effective Length:	Partially Threaded			
Product Code	Size – Shank x NL	Bit Size	HD	Box Quantity
CPP 5.0 x 90 Y or Z	5.0mm x 90.0mm	PZ2	9.75mm ± 0.25mm	100
CPP 5.0 x 100 Y or Z	5.0mm x 100.0mm	PZ2	9.75mm ± 0.25mm	100
CPP 6.0 x 90 Y or Z	6.0mm x 90.0mm	PZ2	11.75mm ± 0.25mm	200
CPP 6.0 x 100 Y or Z	6.0mm x 100.0mm	PZ2	11.75mm ± 0.25mm	100
CPP 6.0 x 120 Y or Z	6.0mm x 120.0mm	PZ2	11.75mm ± 0.25mm	100
CPP 6.0 x 150 Y or Z	6.0mm x 150.0mm	PZ2	11.75mm ± 0.25mm	100



Rapierstar Limited
Star Business Park, Macclesfield, Cheshire SK11 9JA
Tel: +44(0)1260 223311 Fax: +44(0)1260 223399
email: info@rapierstar.com

www.rapierstar.com

